


SKKE 380

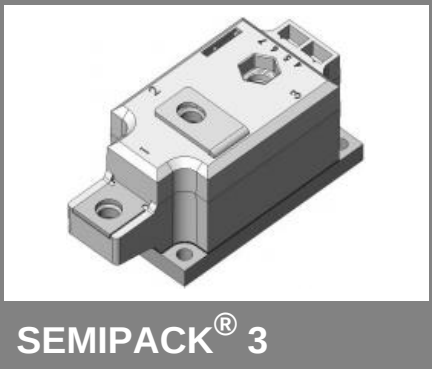

Rectifier Diode Modules

SKKE 380

Features

- Heat transfer through aluminium nitride ceramic isolated metal baseplate
- Precise metal pressure contacts for high reliability
- UL recognized, file no. E 63 53

Typical Applications






- Line rectifiers for transistorized AC motor controllers
- Field supply for DC motors


1) The screws must be lubricated

V_{RSM} V	V_{RRM} V	$I_{FRMS} = 600\text{ A}$ (maximum value for continuous operation) $I_{FAV} = 380\text{ A}$ (sin. 180; $T_c = 100\text{ °C}$)		
1300	1200	SKKE 380/12		
1700	1600	SKKE 380/16		

Symbol	Conditions	Values	Units
I_{FAV}	sin. 180; $T_c = 100\text{ °C}$	380	A
I_{FSM}	$T_{vj} = 25\text{ °C}$; 10 ms	11000	A
	$T_{vj} = 150\text{ °C}$; 10 ms	10000	A
i^2t	$T_{vj} = 25\text{ °C}$; 8,3 ... 10 ms	605000	A²s
	$T_{vj} = 150\text{ °C}$; 8,3 ... 10 ms	500000	A²s
V_F	$T_{vj} = 25\text{ °C}$; $I_F = 1000\text{ A}$	max. 1,25	V
$V_{(TO)}$	$T_{vj} = 150\text{ °C}$	max. 0,8	V
r_T	$T_{vj} = 150\text{ °C}$	max. 0,35	mΩ
I_{RD}	$T_{vj} = 150\text{ °C}$; $V_{RD} = V_{RRM}$	max. 15	mA
$R_{th(j-c)}$	cont.; per diode = per module	0,11	K/W
	sin. 180; per diode = per module	0,116	K/W
$R_{th(c-s)}$	per diode = per module	0,04	K/W
T_{vj}		- 40 ... + 150	°C
T_{stg}		- 40 ... + 130	°C
V_{isol}	a. c. 50 Hz; r.m.s.; 1 s / 1 min.	3600 / 3000	V~
M_s	to heatsink	5 ± 15 %	Nm
M_t	to terminals	9 ± 15 % ¹⁾	Nm
a		5 * 9,81	m/s²
m	approx.	550	g
Case		A 77b	



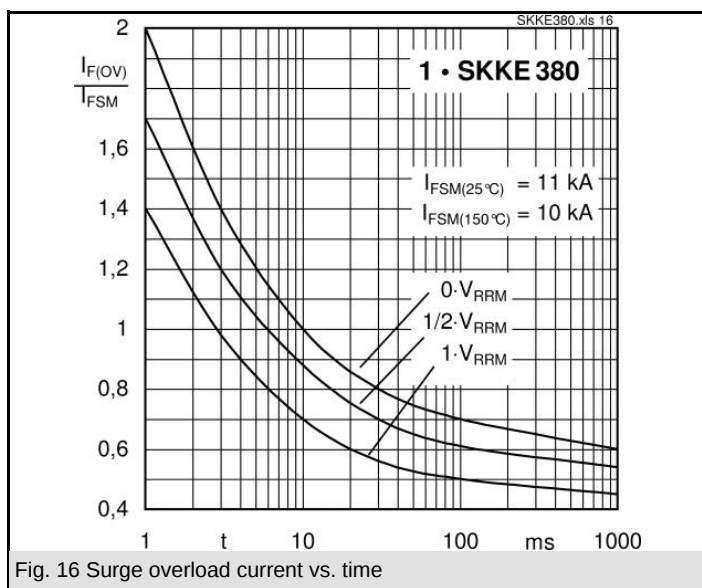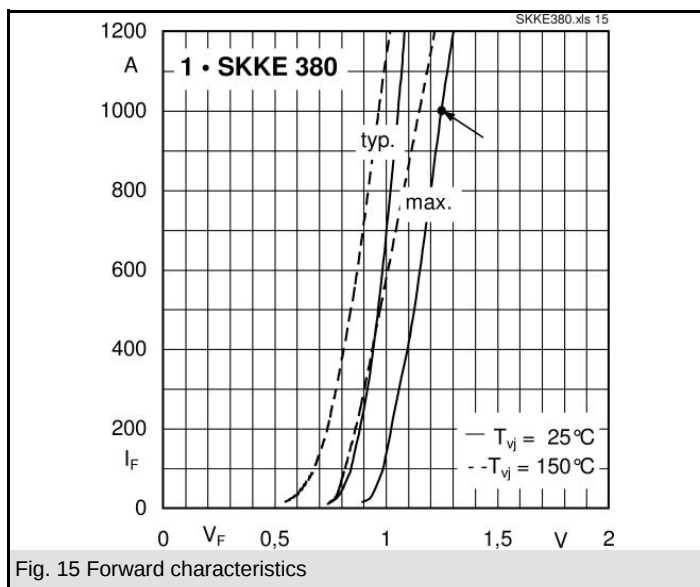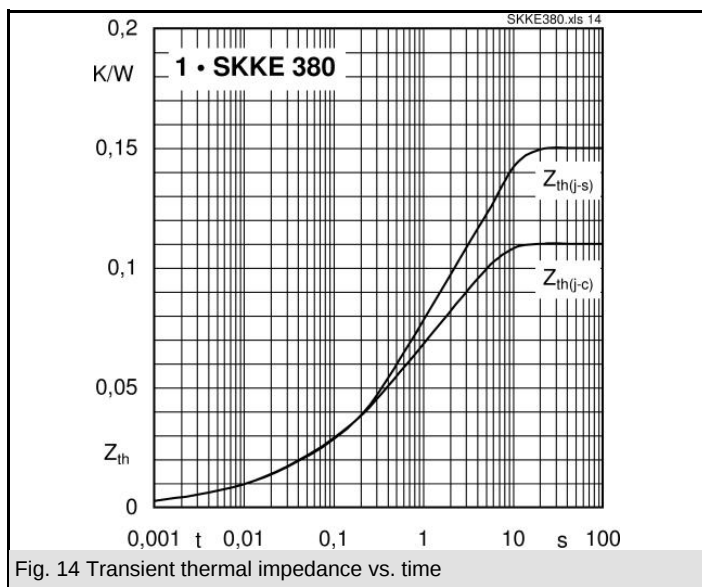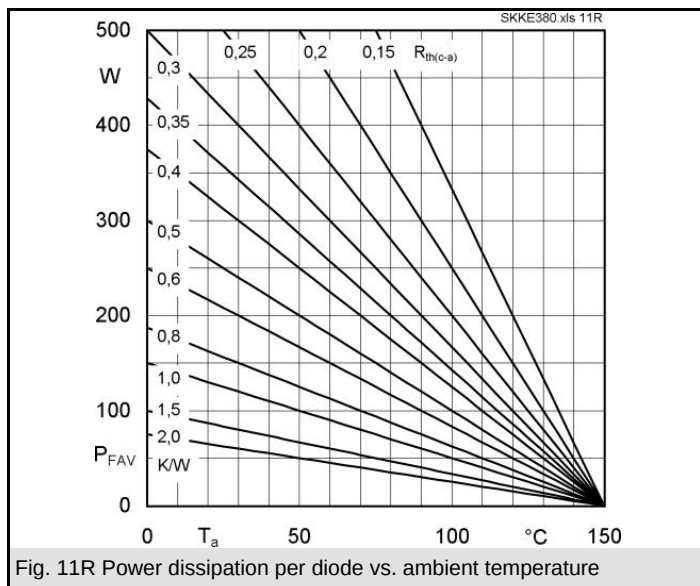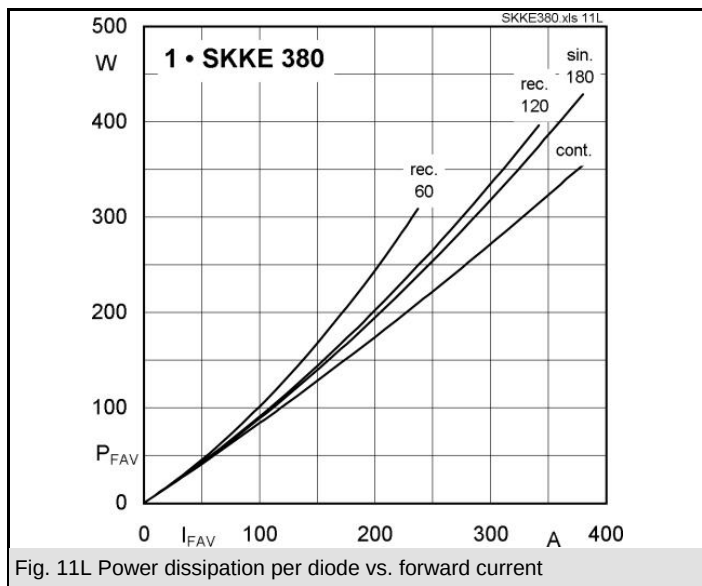

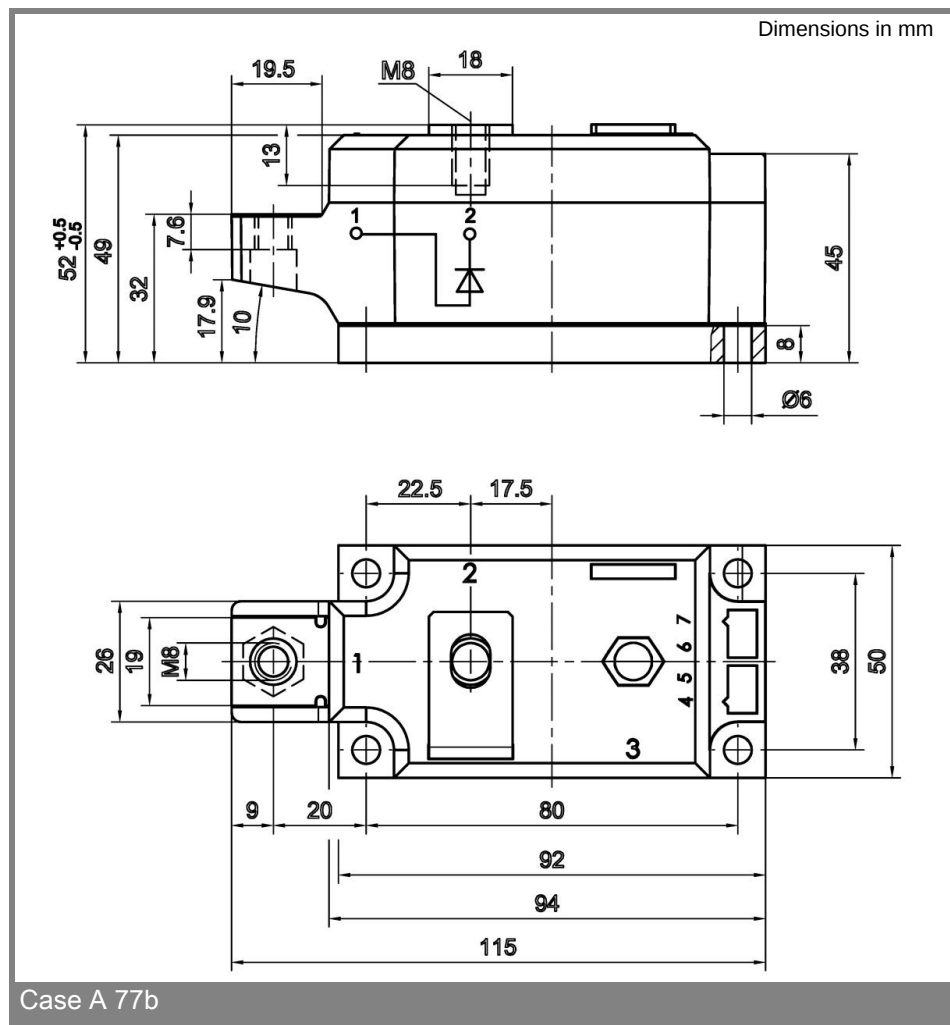

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.